

RACE DEVELOPED TECHNOLOGY

# FX





GENNAKER & CODE 0  
FURLERS  
NEW  
RANGE  
by facnor

[www.facnor.com](http://www.facnor.com)

USER INSTRUCTIONS

GENNAKER & CODE 0 FURLERS

QUICK & EASY TO USE

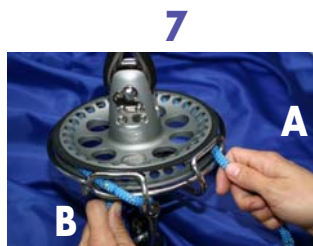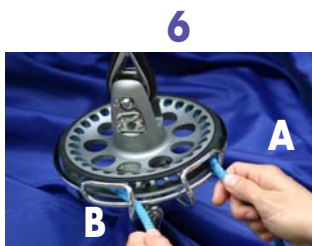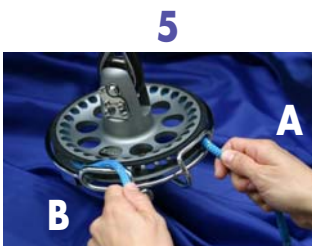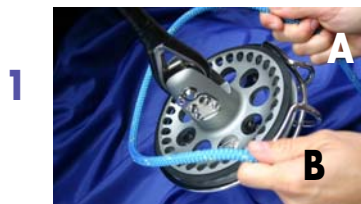

The Facnor Fx furler has been designed to easily furl in and out your Gennaker or Code Zero. Moreover, our design team has developed different innovations in order to safely and quickly install the furler.

### A – USING AND FITTING THE FURLING LINE

1 - Position the continuous furling line round and above the drum.

2 - Put the A part of the furling line between the two hooks (C) and slide the line under the hook on the right hand side.


3 - 4 - 5 - Pull the B part of the furling line to progressively introduce the line underneath the rubber ring until to reach the left hook.

6 - Put down the B part of the furling line between both hooks.

7 - Slide the B part of the furling line underneath the second hook.

8 - The line runs through both guide exits. It is now ready to use: just pull the continuous line to furl the Gennaker or the Code Zero.


B – REMOVING OR FITTING THE WIRE TERMINAL ONTO THE DRUM AND SWIVEL

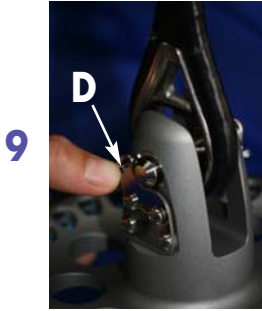

9

9 & 10 - To remove the wire terminals (thimbles) from the drum or swivel, remove the captive pin : push the spring (D) and pull the pin. The jaws are now accessible.

11 - To fit the pin back : just push the pin ONLY until the spring "clicks" (no need to touch the spring). The pin is now safely fixed.

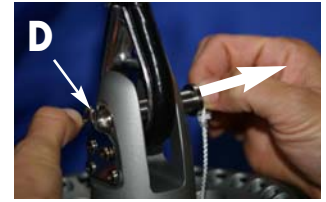

10

C – EASY ORIENTATION OF THE FURLING GUIDE

12 & 13 - Thanks to the multi-drilled step (E) the stainless steel guide can be adjusted in order to correctly orientate the furling line according to the chain plate attachment.



11

D – ADVICE

- before hoisting think about the operation;
- check that the Gennaker furler is clear of any other halyards and lines;
- when fitting the Gennaker furler on the foredeck make sure you are secured to the boat by a tether line.



12

E – INSTALLATION

The gennaker furler is installed (as shown on a Phabulo Open 35). Lay the gennaker furled on the deck, fit the bottom thimble onto the drum and the upper thimble onto the swivel, adjust the bowsprit, hoist and finally unfurl while controlling the sheet. All done!



13

E A S Y I N S T A L L A T I O N O N B O A R D



1

2

3

4


5

6

F – MAINTENANCE :



- Fx furlers do not require any particular maintenance. Just clean regularly the furler with warm fresh water to remove salt deposits (ideally after each use).
- Do not apply any solvent, lubricating nor chemical products on the rubber ring of the continuous line drum.

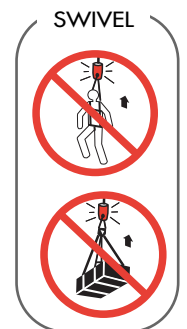

Please do not hesitate to contact Facnor sales team or agents if you have any queries : [info@facnor.com](mailto:info@facnor.com) // [www.facnor.com](http://www.facnor.com)