


**1 – BOX CONTENT**



Technical support

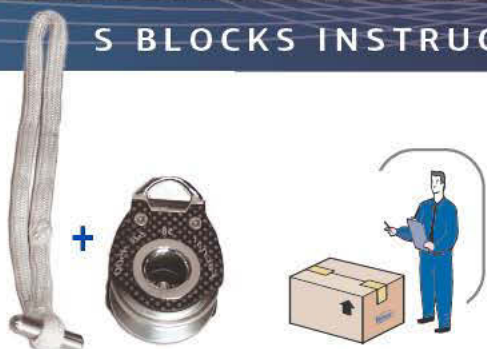

(PDF only)

**2 – TECHNICAL DATAS**

SB SNATCH BLOCK- (Pivoting carbon cheeks)					
Model	FX+/FXT/FAST model	∅ Sheave (mm)	Height (mm)	Weight (g)	Reference
SB2500	2500	50	77	281	43170102540
SB4500	4500	57	84	341	43170104540
SB7000	7000	64	93	429	43170107040

**3 – BLOCK OPENING**



**4 – FITTING A TWO-TO-ONE BLOCK (COMPULSORY INSTALLATION ON SWIVEL)**



**5 – OTHER FITTING (FOR EXAMPLE : DECK FITTING)**



**6 – SAFETY LOCK (IF NEEDED)**



**MAINTENANCE :**


- Rinse the mechanisms after use.



Please do not hesitate to contact Facnor sales team (info@facnor.com) or agents if you have any queries : info@facnor.com

Ref. 29160040110 ind. A

## 1 – VÉRIFICATION DU COLIS

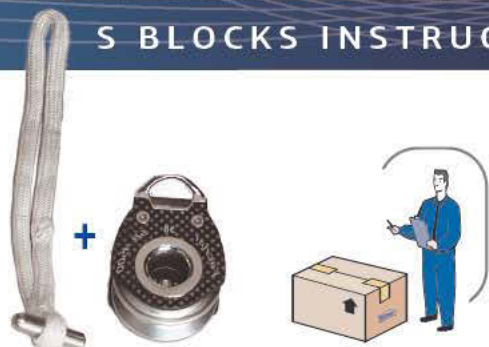

Support technique



(PDF uniquement)

## 2 – CARACTÉRISTIQUES TECHNIQUES

POULIE MOUFLAGE SB					
Modèle	Réf. FX+/FXT/FAST	Ø RÉA	HAUTEUR (mm)	POIDS (g)	Référence
SB2500	FX+2500	50	77	281	43170102540
SB4500	FX+ 4500	57	84	341	43170104540
SB7000	FX+7000	64	93	429	43170107040

## 3 – OUVERTURE DE LA POULIE



## 4 – MONTAGE EN POULIE DE MOUFLAGE (SENS DE MONTAGE IMPÉRATIF)



## 5 – AUTRE UTILISATION (ACCROCHE PONT, ÉCOUTE,...)



## 6 – SÉCURISATION DU VERROUILLAGE (SI NÉCESSAIRE)



### MAINTENANCE :

- Rincer les mécanismes régulièrement (sans pression excessive)



Notre service technico-commercial ainsi que l'ensemble des revendeurs Facnor se tiennent à votre disposition pour tout renseignement ou conseil : [info@facnor.com](mailto:info@facnor.com)