ASYMMETRIC SPINNAKER FURLERS

The FX+ furler, fitted with the Fast thimble, allows furling of asymmetric Spinnakers from the cockpit by pulling the bottom furling line. The anti-twist rope rotates up to the top and transmits the rotation from the head to the tack of sail. With this simple system it is possible to use your existing asymmetric Spinnaker.

FAST ASYMMETRIC SPINNAKER THIMBLE

FX+ FAST

- FAST thimble: this system allows you to use your FX+ from Gennaker to asymmetric Spinnaker in a two clicks
- Possibility to use your existing asymmetric Spinnaker
- Easy and regular furling from top to bottom (see pictures below). Free luff on asymmetric Spinnaker
- Tested mechanisms, strong & clever
- Maintenance free: high protection of the mechanisms
- XL model: adapted for structural luff sails

FX+ swivel with anti-impact cover (neoprene)
(see options)

From Gennaker /Code Zero to Asymmetric Spinnaker

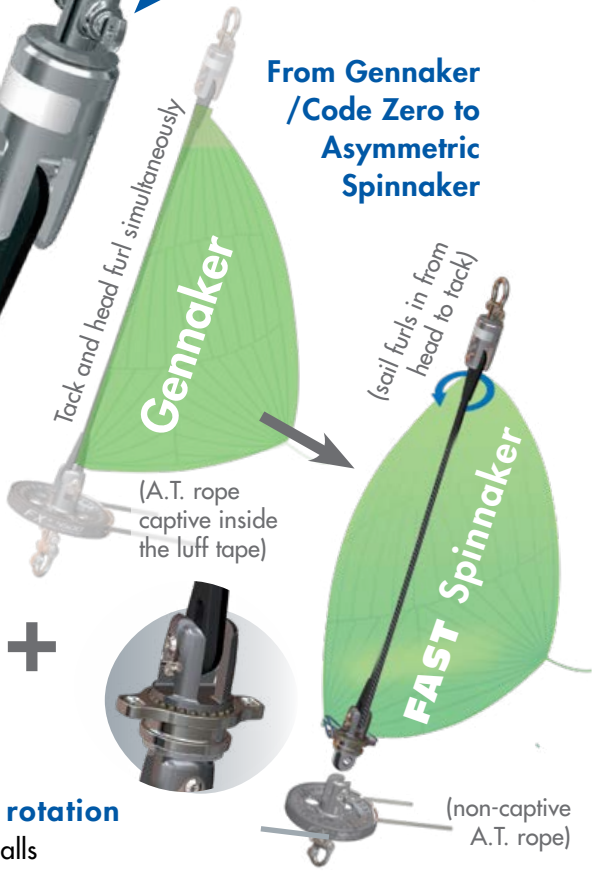

FX+ quick connection

Fast XL Thimble
larger, soft design, specially adapted for structural luff sails

Anti-twist rope (supplied on request)

Smooth rotation
Torlon® balls

Safe tack attachment
Stainless steel. Resistant and smooth edge for a secure lashing

FAST : Gennaker / Asymmetric Spinnaker thimble
Rotating tack fitting with Torlon® balls (Tack attaching rope included).

Thimble perfectly designed to fit the FX+ drum jaws
with quick release pin

Fast XL Thimble

Carbon housing
strong and light

Removable furling line

> Video Fast FX+

"top-down" system

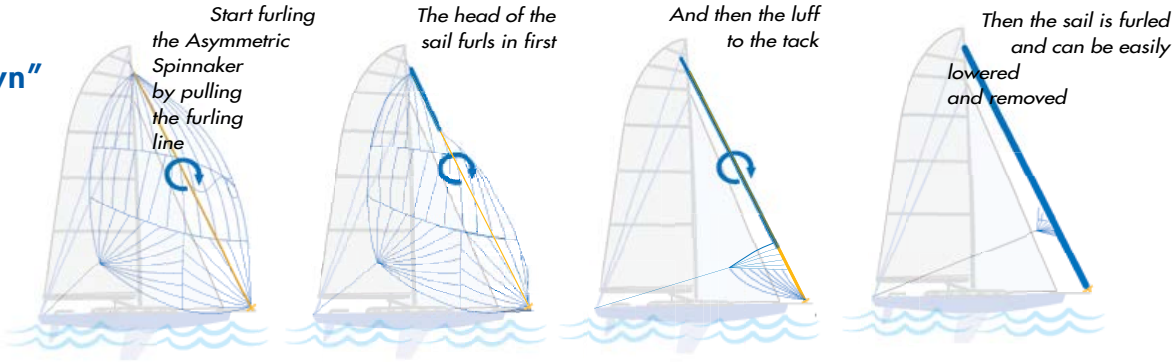

FX+ Furler

FAST thimble

■ Ratchet system (option)
see page 34 & 35

FX+ / FAST : FURLER MODELS

Model	FX+ FAST 900	FX+ FAST 1500	FX+ FAST 2500	FX+ FAST 4500	FX+ FAST 7000	FX+ FAST 12000
Boat length meter / feet	6 → 10,5 20 → 28'	10 → 12 28 → 40'	12 → 14 40 → 45'	13 → 16 42 → 55'	16 → 20 55 → 70'	contact us
Max asymmetric Spinnaker area	40 m² 430 Ft²	80 m² 861 Ft²	150 m² 1614 Ft²	240 m² 2583 Ft²	340 m² 3660 Ft²	

FX+ FAST: Option fitting for asymmetric Spinnaker

(System suitable for use with an existing FX furler)



(Pin to pin)

Fast thimbles for FX+ furlers					
Model	FX+/FXT Model	Jaw width (mm)	H Height (mm)	Weight (g)	Reference
FAST 900	FX+ 900	12	65	220	43230000940
FAST 1500	FX+ 1500	15	65	222	43230001540
FAST 2500	FX+ 2500	17,5	82	426	43230002540
FAST 4500	FX+ 4500	19	92	581	43230004540
FAST 7000 XL	FX+ 7000	SEE BELOW (Fast XL)			
FAST 9000 Std	FX+ 9000	26	142	1915	43230120030
FAST 9000 Rac.		22	142	1915	43230120040
FAST 12000	contact us				
Custom					

■ Option Tack spool
contact us

■ Fast XL

Fast XL: larger model: Suitable for structural luff sails

XL Fast thimbles for FX+ furlers					
FAST XL 2500	FX+ 2500	17,5	82	426	43232002540
FAST XL 4500	FX+ 4500	19	92	581	43232004540
FAST XL 7000	FX+ 7000	26	119	1114	43232007040

Adjusting the tack :

■ To sail closer to the wind even better, it is necessary to lower the sail tack, this will push forward the belly. Inversely, lift up the tack and the belly of the sail will go aft, you will be able to sail further downwind.

TACK ADJUSTMENT

Option available for your asymmetric Spinnaker:

■ **SSH+ solid sheave**:
- used to adjust the tack point, with a maximum luff;
- This option is available from 1500 up to 12000 (above models on request).

■ See page 49