

## STRENGTH & ADAPTABILITY

Foil sections are fitted on the various headsail furling and reefing systems : classic drum (LS, LX, RX), webbing drum (FD) and motorized drum (EC & EF+, HF).



### Long high performance polyamid bearing

centres forestay inside foil

### CNC machining holes

insuring the sections will be perfectly aligned

### Torx print

easy assembly and dismantling

### Material insulated

Screws covered with tuff lock® (locking and insulating product)

### Telescopic section

Allows adjusting the section length.  
High torque resistance



### Connectors with high torque resistance

guarantee a great rigidity at the section connections


### Anodized extruded aluminium

Material : 6000 series  
Standard Length : 2 m (6'8")

## SX & R SECTIONS DIMENSIONS

### ROUNDED SECTIONS SX 25 / SX 33 / SX 39 / SX 47 / SX 53 :

The SX twin groove foil sections, round shaped, offer smooth furling as well as a high rigidity. We recommend a 5mm finished luff tape

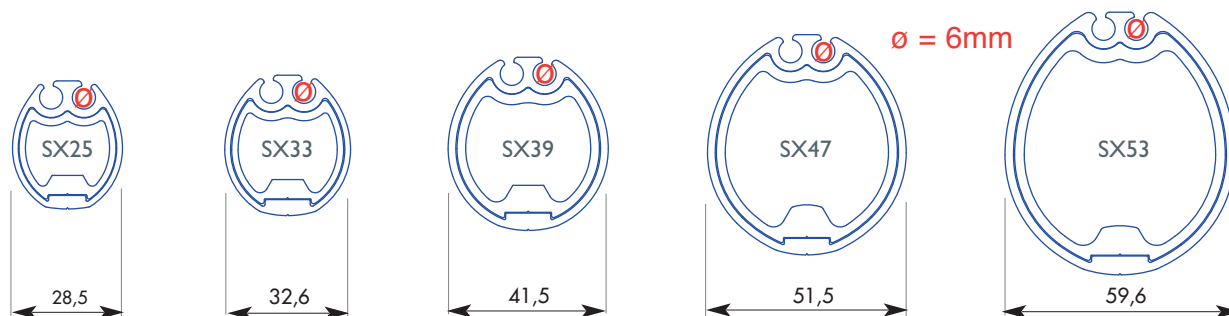

### ELLIPTICAL SECTIONS R14 / R24 / R26 / R34

This range of sections offers good aerodynamics, and the twin-groove allows easy sail changing. We recommend a 5mm finished luff tape except for the R14 (4.5 mm).

