


The thimbles

- Adjusted to the mechanism jaw for a optimum transmission in rotation.

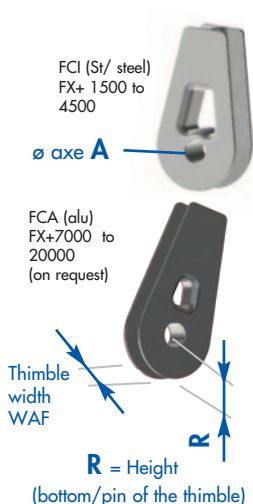

FCI / FCA / FC+ STANDARD THIMBLES						
Model	FX+/FXT/FAST Ref.	Rope ø (mm)	Axis ø A (mm)	WAF	R	Reference
FCI 1500	FX+ 1500	9 → 11	8	14,5	15	25200010110
FCI 2500	FX+ 2500	11 → 13	10	17	18,5	25200010112
FCI 4500	FX+ /FXT 4500	13 → 15	12	18,5	22	25200010114
FCA 7000	FX+ /FXT 7000	16 → 22	14	25	35	43130237030
FCA 12000	FX+ 12000 std	16 → 22	16	25	35	43130231220
FCA 12000	FX+ 12000 race	16	18	21	35	43130231230
FC+ 20000*	FX+ 20000 std	20 → 24	20	28	41	43130232020
FC+ 20000*	FX+ 20000 race	20 → 24	29	30	41	43130232030

* 2 models : Standard & Racing for FCA 12000 & FCA+ 20000