



> Sailboat 26 > 43'



INSTALLATION = NEW CONCEPT but EASY

- > Hoist the sail with the trigger / hoisting line
- > Tighten & lock the pin (reduced diameter halyard)
- > Slack the trigger / hoisting line
- > The luff is ready to be down hauled
- > Adjustable sliding drum with the cunningham line*

*Cunningham, possibility to extend it to the cockpit

TACKFURL INNOVATION : KEY FEATURES



- ① Halyard lock : internal device fitted at the top of the foil sections
No swivel required - No halyard
- ② Hoisting / Trigger line : no halyard required with the lock
- ③ Integrated and simple sail trimming : Cunningham attachment below drum plate`
- ⑤④ Low profile adjusting drum & Torlon® ball bearings mechanism
- ②⑥ Complete kit including Trigger/Hoisting line, full furling systems,
- ⑦ & cunningham rope

TACKFURL INNOVATION : KEY BENEFITS IN USE

- > No more mast compression
- > No top swivel required
- > Max Luff : no halyard swivel and compact drum without link plates
- > Optimum down-hauled luff tensioning
- > Frictionless rotation thanks to Torlon® ball bearings

TECHNICAL DATA - TACKFURL RANGE

BOAT LENGTH	MODEL	FOIL SECTION	FORESTAY Ø	FORESTAY LENGTH	FULL KIT
26 < 33' 8 < 10m	TF 110	R14	6-7 mm	10M40	Complete including halyard + furling system + cunningham rope
29 < 39' 9 < 12m	TF 190	R24	7-8 mm	14M40	
36 < 43' 11 < 13m	TF 230	R26	10 mm	16M50	

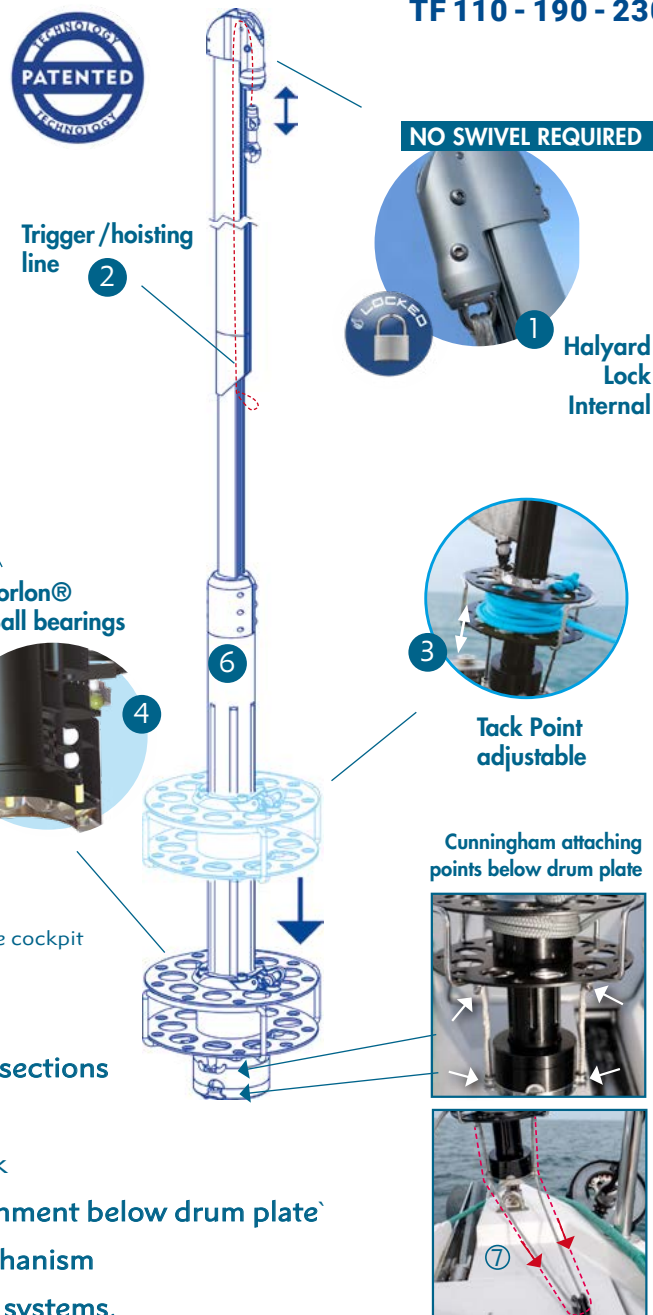

⑤ Low profile drum without link plates

TACKFURL

